



Sealed Lead-Acid Battery

UPG No. 40800

UB1270

Maintenance-Free

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

Specification

Nominal Voltage	12 volts		
Nominal Capacity	77° F (25° C)		
20-hr. (0.35A)	7 Ah		
10-hr. (0.63A)	6.3 Ah		
5-hr. (1.12A)	5.6 Ah		
1-hr. (4.2A)	4.2 Ah		
Approximate Weight	4.8 lbs (2.18 kgs)		
Internal Resistance (approx.)	25mΩ		
Shelf Life (% of normal capacity at 77° F (25° C))			
3 Months	6 Months	12 Months	
91%	82%	64%	
Temperature Dependency of Capacity	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%



Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	2.1 A or smaller
Control Voltage	14.4 - 15.0 V

Float Use


Control Voltage	13.5 - 13.8 V
-----------------	---------------

Physical Dimensions: in (mm)




L: 5.94in (151 mm)
W: 2.56in (65 mm)
H: 3.74in (95 mm)
TH: 3.98in (101 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Terminals

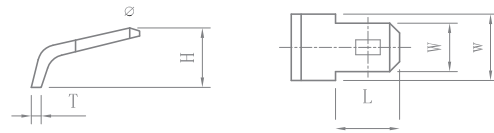


Dimension Type	L	W	w	H	T
F1	6.50	4.75	6.00	5.00	0.80
F2	7.80	6.35	7.80	6.00	0.80

Discharge Characteristics (0°C/32°F, 40°C/104°F)

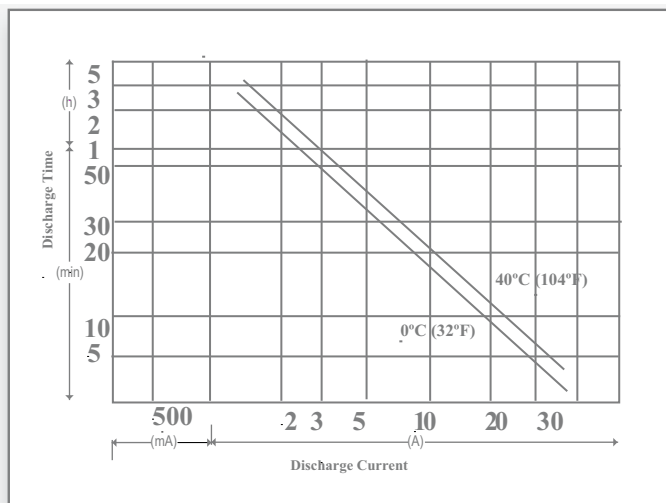

Discharge Characteristics (20°C, 68°F)

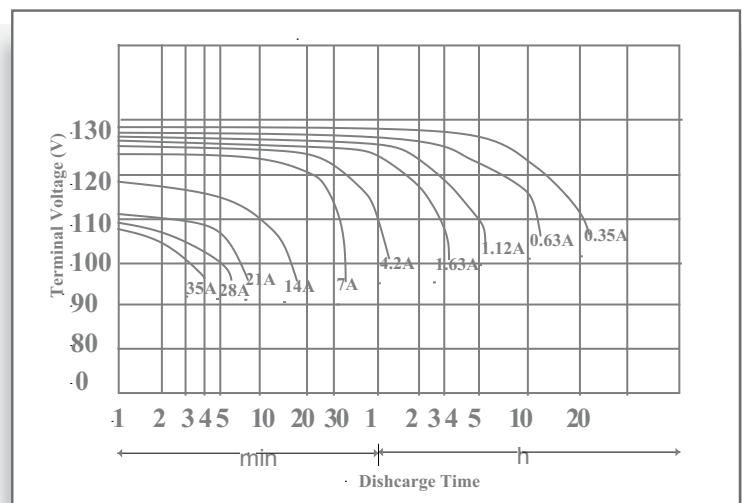


ISO 9001 :2008

www.upgi.com


VR021810

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com


Shelf Life & Storage

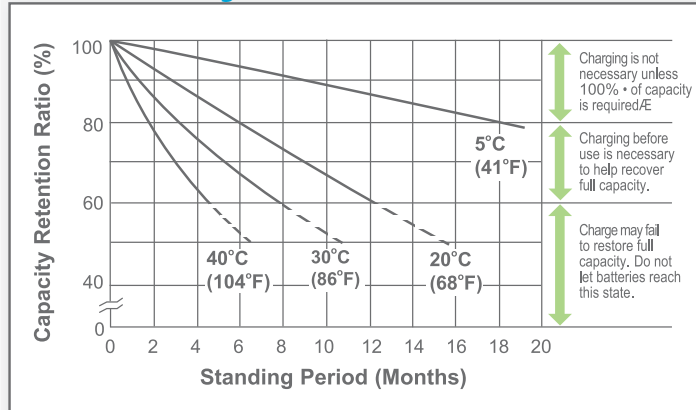


Cycle Life vs Depth of Discharge

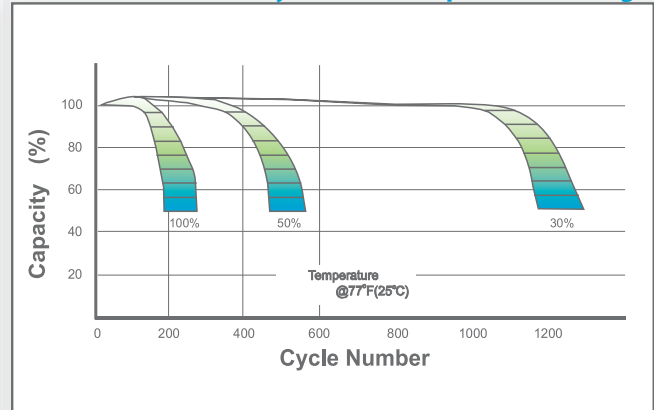

Open Circuit Voltage vs Residual Capacity

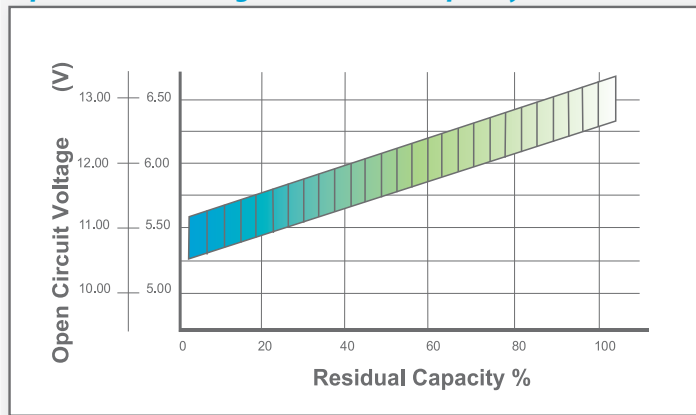

Effect of Temperature on Capacity

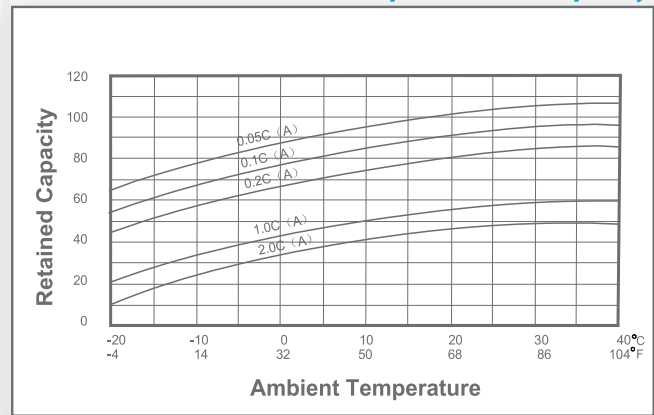

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.35C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.325	2.30~2.35						



ISO 9001 :2008

Let UPG Power Your Life.

www.upgi.com