

DS-2CC12D9T-AIT3ZE

2 MP Outdoor Ultra-Low Light PoC Bullet Camera



- 2 MP High Performance CMOS
- Analog HD Output, up to 1080p Resolution
- Ultra-Low Light, Power-over-Coax (PoC)
- Auto Focus, 2.8 mm to 12 mm Motorized Varifocal Lens
- 120 dB True WDR, 3D DNR
- EXIR 2.0 with 130 ft (40 m) IR Range
- Dual Output: 1 HD Analog, 1 CVBS
- PoC.at, Smart Voltage Detection
- 1 Alarm Input and Output
- Up-the-Coax (HIKVISION-C)
- IP67 Protection

The Hikvision DS-2CC12D9T-AIT3ZE 2 MP Outdoor Ultra-Low Light, Power-over-Coax (PoC) Bullet Camera provides high definition analog output. TurboHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

EXIR is Hikvision's proprietary IR extended range technology, which has a range of 130 feet (40 meters).

The 2.8 mm to 12 mm lens is optimized for viewing angles that fit any situation. True 120 db WDR (Wide Dynamic Range) ensures that ideal images are captured regardless of the lighting conditions.

Available models:

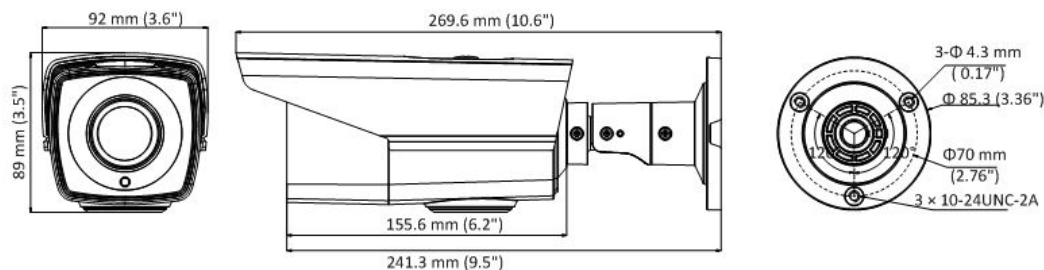
DS-2CC12D9T-AIT3ZE





Specifications

DS-2CC12D9T-IT5E	
Camera	
Image Sensor	2.0 MP progressive scan CMOS
Signal System	NTSC
Effective Resolution	1920 (H) × 1080 (V)
Frame Rate	1080p @ 30 fps
Minimum Illumination	0.003 lux @ (f/1.2, AGC on), 0 lux with IR
Shutter Speed	1/30 s to 1/50,000 s
Slow Shutter	Supported
Lens	2.8 mm to 12 mm, motorized varifocal lens
Horizontal Field of View	32.1° to 98°
Lens Mount	Ø14
Auto Iris	Supported
Day/Night	IR cut filter
Angle Adjustment (Bracket)	Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360°
Synchronization	Internal synchronization
WDR	>120 dB
Menu	
AGC	Supported
Day/Night Mode	Auto/Color/BW (black and white)
White Balance	ATW/AWC-SET/MANUAL
Privacy Mask	ON/OFF, 8 programmable privacy masks
Motion Detection	4 programmable motion areas
Backlight Compensation	WDR/BLC/HLC/OFF
2D and 3D DNR	ON/OFF
Voltage Detection	Supported
Scene	Indoor/outdoor/indoor/low light
Functions	Defog, mirror, defective pixel correction, sharpness, camera title
Interface	
Video Output	1 HD analog output/1 CVBS output (75 Ω/BNC)
Alarm	1 alarm input and output
General	
Operating Conditions	-40° to 140° F [-40° to 60° C], humidity: 90% or less (non-condensing)
Power Supply	24 VAC/12 VDC ±30%/PoC.at
Power Consumption	Maximum 7.5 W
Material	Metal
IR Range	Up to 130 ft (40 m)
Ingress Protection	IP67
Communication	Up-the-Coax, Protocol: HIKVISION-C
Dimensions	3.62" × 3.36" × 10.61" (92 mm × 85.3 mm × 269.6 mm)
Weight	Approximately 1.54 lbs (0.7 kg)

Dimensions



Accessories¹

NOT INCLUDED	INCLUDED ²
 <p>CBS Conduit Base</p>	 <p>24 VAC to 12 VDC Converter/Filter Use for 24 VAC line interference See Technical Bulletin: https://us.hikvision.com/sites/default/files/tb/tb_power_filter_121319na.pdf</p>

¹Additional accessories not shown may fit without, or in combination with, these accessories. See your sales representative for information about your needs.

²Included in box since 6/19. Contact Hikvision Customer Service, cust.usa@hikvision.com, to request converter/filter at no charge if it is needed and is not included in your box. Please include camera model number, serial number, place of purchase, and shipping address.