

LXIPBDARK4-VF

New H.265+ 4MP Dark-Fighter motorized lens IP bullet camera




DARKFIGHTER



Features

- 4MP, 2560 × 1440 resolution
- 2.8 to 12 mm focal length
- Color: 0.005 lux @(F1.2, AGC ON), 0.016 lux @(F1.6, AGC ON), 0 lux with IR
- True WDR 120dB
- IR up to 165ft
- Support audio I/O, alarm I/O
- Support on-board storage up to 128GB
- Powered by Dark-Fighter
- H.265, H.265+, H.264+, H.264
- IP67, IK10
- 4 behavior analyses and face detection

Dimensions (in)

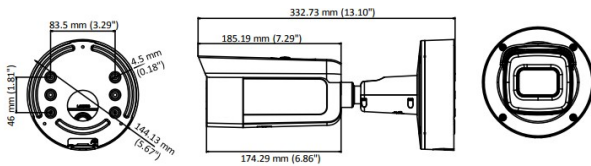

Order Model

LXIPBDARK4VF

Optional Brackets



Bracket-3XCM-L

Bracket-3XPOLE-L

Camera	
Image Sensor	1/2.5" Progressive Scan CMOS
Min. Illumination	Color: 0.005 Lux @ (F1.2, AGC ON), 0.016 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/10,000 s
Slow Shutter	Support
Lens	horizontal FOV: 114° to 32° vertical FOV: 59° to 18° diagonal FOV: 1415° to 36.5°
Lens Mount	Ø14
Day & Night	IR cut filter
WDR	120dB
Compression Standard	
Video Compression	H.265+/H.265/H.264/MJPEG/H.264+
Video Bit Rate	32 Kbps – 16 Mbps
Audio	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-192Kbps(MP2L2)
Image	
Max. Resolution	2560 × 1440
Frame Rate	50Hz:25fps (2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2560 × 1440, 2304 × 1296, 1920 × 1080)
Image Enhancement	BLC/3D DNR
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness and white balance adjustable by client software or web browser
Day/Night Switch	Day/Night/Auto/Scheduled/Triggered by Alarm In
Network	
Network Storage	Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS, SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter
System Compatibility	ONVIF (PROFILE S, PROFILE G), ISAPI
Interface	
Onboard storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Communication	1 RJ45 10M / 100M Ethernet interface
Audio	
Audio	1 input (line in, 3.5 mm), 1 output(3.5 mm), mono sound
Alarm	1 input, 1 output
General	
Operating Conditions	-22 °F – 140 °F Humidity 95% or less (non-condensing)
Power Supply	12V DC±25%, PoE (802.3af)
Power Consumption	12 VDC, 1.2A, max. 14.4W PoE (802.3at, 42.5V to 57V), 0.5A to 0.3A, max. 18W
Protection Level	IP67, IK10
IR Range	165ft
Dimensions	Ø144.1×332.7 mm (Ø5.7"× 13.10")
Weight	4.2lbs

* Product specifications may change without prior notice.

