

LXIPBPRO4-VF-AUD


New H.265+ 4MP WDR motorized lens IP bullet camera



Features

- 4MP, 2560 × 1440 resolution
- 2.8 to 12 mm focal length
- True WDR 120dB
- IR up to 165ft
- Support audio I/O, alarm I/O
- Support on-board storage up to 128GB
- DC 12V, POE
- H.265, H.265+, H.264+, H.264
- IP67, IK10
- 2 behavior analysis and face detection

Dimensions (in)

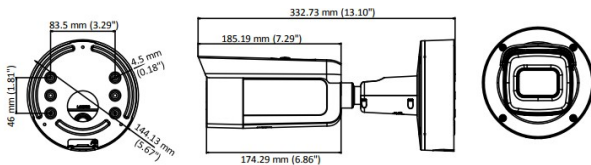

Order Model

LXIPBPRO4VFAUD

Optional Brackets



Bracket-3XCM-L



Bracket-3XPOLE-L

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/10,000 s
Slow Shutter	Support
Lens	horizontal FOV: 98° to 28° vertical FOV: 51° to 16° diagonal FOV: 115° to 32°
Lens Mount	Φ14
Day & Night	IR cut filter with auto switch
WDR	120dB
Compression Standard	
Video Compression	H.265+/H.265/H.264/MJPEG/H.264+
Video Bit Rate	32 Kbps – 16 Mbps
Audio	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	2560 × 1440
Frame Rate	50Hz:25fps (2560 × 1440, 2304 × 1296, 1920 × 1080) 60Hz: 30fps (2560 × 1440, 2304 × 1296, 1920 × 1080)
Image Enhancement	BLC/3D DNR
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Network	
Network Storage	Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter
System Compatibility	ONVIF (PROFILE S, PROFILE G), ISAPI
Interface	
Onboard storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Communication	1 RJ45 10M / 100M Ethernet interface
Interface	
Audio	1 input (line in, 3.5 mm), 1 output(3.5 mm), mono sound
Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
General	
Operating Conditions	-22 °F – 140 °F Humidity 95% or less (non-condensing)
Power Supply	12V DC±25%, PoE (802.3af)
Power Consumption	12 VDC, 1.2A, max. 14.5W PoE (802.3at, 42.5V to 57V), 0.43A to 0.3A, max. 18W
Protection Level	IP67, IK10 TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
IR Range	165ft
Dimensions	Φ144.13×332.73 mm (Φ5.67"× 13.10")
Weight	3.8lbs

* Product specifications may change without prior notice.

