


RE524X Resolution's Universal Translator

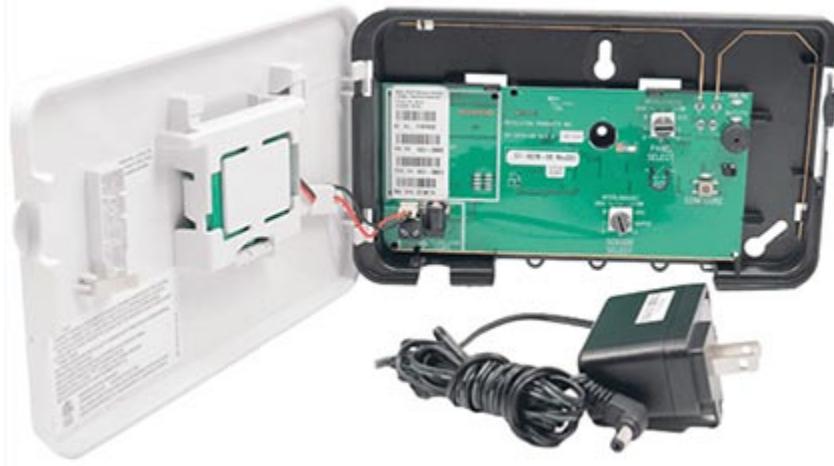

RE508X Hardwire-to-Wireless Flex™ Translator	RE524X Wireless-to-Wireless Flex Translator
<p>INPUT: 8Zones EOL Resistor: Any or none OUTPUT: GE®, Honeywell®, 2GIG™, CryptiX™, and DSC™</p>	<p>64 Zones Translation for Honeywell. Unlimited for others. INPUT: GE, Napco™, Honeywell, 2GIG, and DSC OUTPUT: GE, Honeywell, 2GIG, and DSC Repeater: GE, Honeywell, 2GIG, and DSC</p>
<p>Dual Diversity antennas for whole house coverage.</p>	
<p>UL1023 Compliance*</p>	
<p>No need to use an external power supply or a supply from the existing panel. Backup battery comes connected and activates on first power-up. Simple barrel power connector. Loss of wall power warning chirp. Wall power supply included</p>	
<p>24 hour backup all contact zones Powered devices: 200mA max, 4 hours battery backup @ 80mA</p>	<p>24 hour backup all zones Powered devices: 200mA max, 4 hours battery backup @ 80mA</p>
<p>Cover Tamper capable</p>	
<p>Automatic detection of sensor type to reduce programming complexity</p>	
<p>Programming LOCK: Prevents competing dealers from taking over the Translator</p>	